



## MONO


250, 260, 270



## Black Panther

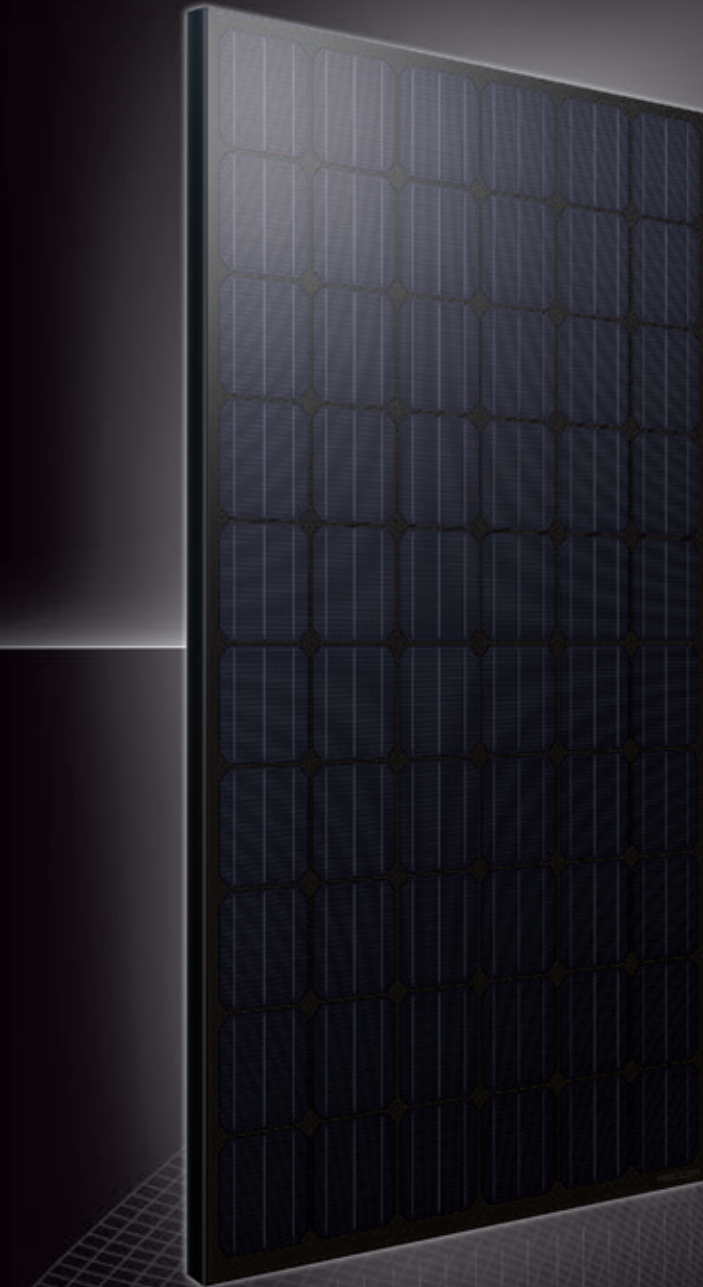

 EUROPEAN  
Warranty Engineering

 Exceptional aesthetics  
elegantly beautiful

 °C Temperature Coefficient  
of Pmax -0.40% / °C

  Guaranteed  
Positive Power



CEC  
approved  
products

## MONO

250, 260, 270

### ELECTRICAL CHARACTERISTICS


Rated Power:	250W	260W	270W
Power Tolerance :	0%/+5W	0%/+5W	0%/+5W
Maximum Power Voltage (Vmp):	31.30V	31.70V	32.12V
Maximum Power Current (Imp):	8.09 A	8.32A	8.45A
Open Circuit Voltage (Voc):	37.92V	38.52V	38.76V
Short Circuit Current (Isc):	8.51A	8.66A	8.78A
Module Efficiency	15,4%	16,0%	16,6%
Maximum Series fuse:	15A	15A	15A
Maximum System Voltage:	1000V DC(IEC) / 1000V DC(UL)		

Tested at Standard Test Conditions. Measurement tolerances: ± 3%

### MECHANICAL DATA


Dimensions	1640mm x 992mm x 40mm
Frame	Anodized aluminum
Weight	19 kgs
Front Glass	3.2 mm AR low iron tempered glass
Output Cables:	TUV (2Pfg1169:2007), UL 4703, UL44 4.0 mm <sup>2</sup> (0.006 in <sup>2</sup> ), symmetrical lengths (-) 1000mm and (+) 1000 mm, MC4 type connectors

### DIMENSIONS

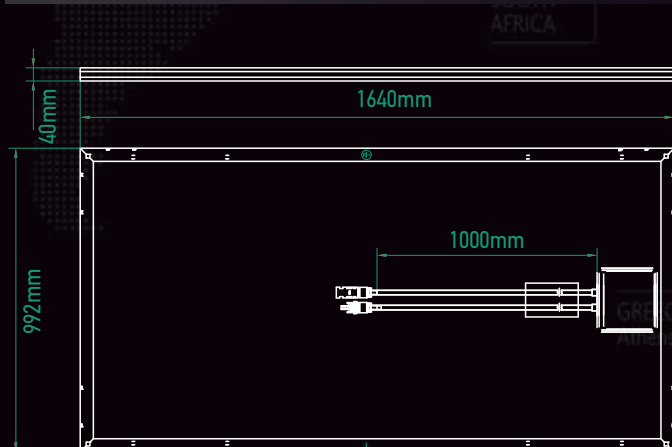

Specifications are subject to change without further notification  
Release 2014-01-10, v1.3

### V-I CURVE

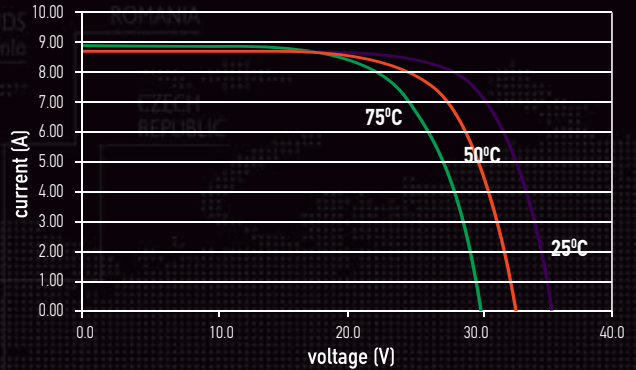

### TEMPERATURE CHARACTERISTICS

Pmax Temperature Coefficient	-0.40% / °C
Voc Temperature Coefficient	-0.32% / °C
Isc Temperature Coefficient	+0.08% / °C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C

### PACKING CONFIGURATION

Container	TURKEY	20'GP	40'HC
Pieces per Pallet		26	26
Pallets per Container		12	28
Pieces per Container		312	728

### TESTS, CERTIFICATIONS AND WARRANTIES

Standard tests	UL1703, IEC 61215, IEC 61730
Quality tests	ISO 9001: 2008, ISO 14001: 2004, ISO17025: 2005
Certifications	Class C Fire Rating, conformity to CE, PV CYCLE
Extreme wind and snow loads testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Positive tolerance	Guaranteed positive tolerance of up to 5W
Junction Box	IP67 Rated, 3 by-pass diodes
Warranties	<ul style="list-style-type: none"> <li>• 10-year limited product warranty</li> <li>• 25-year transferable linear power output warranty</li> </ul>

### LINEAR PERFORMANCE WARRANTY

